



kurtaran

LIVE HOSE REEL

Kurtaran Vertical Live Hose Reels are suitable to use at Outdoor areas for industrial applications.

Inlet: 2" ANSI B16.5 #150 R.F. Flanged. (Water inlet is controlled by 1½" OS&Y Gate Valve)

Materials of Construction: Body is cast from GGG-40. Support stands and roof are constructed from St-37 carbon steel. Support stands & roof are zinc-phosphated coated primarily and polyester powder coated to RAL3002.


Hose Reel: 1" semiflexible high pressure fire hose. Working pressure is 25 bar. Hose will comply with TS-2420-3-EN ISO 1403. (Hose length can be selected 30m. or 46 m.)

Nozzle: 1" Bronze Jet/Fog Nozzle. (Alternative: #361 Hard Anodised Aluminium Nozzle)

Drain Connection: ¾" Automatic Ball Drip Valve (Alternative: ¾" Ball Valve)



(VERTICAL LIVE HOSE REEL)

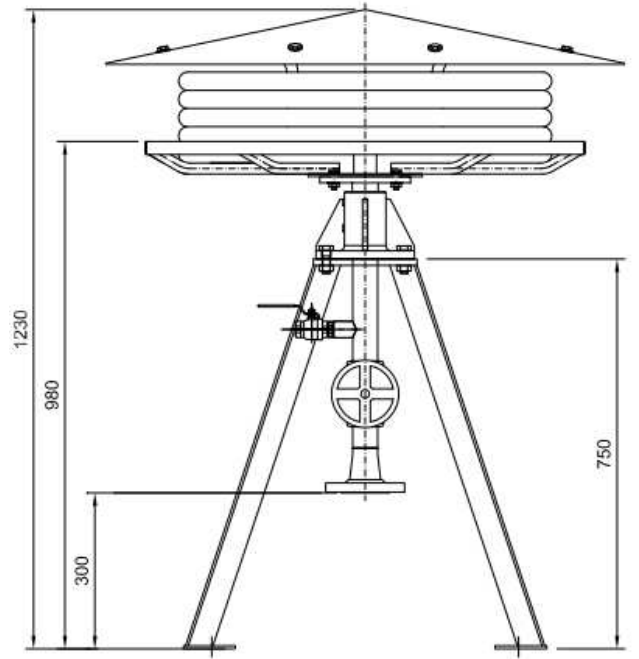

(LIVE HOSE REEL DIMENSIONS)

The right is reserved to vary or modify any specification without prior notice.



DOĞAN YANGIN
SÖNDÜRME SAN. ve TİC. A.Ş.

Perşembepazarı Cad. No:13/C Karaköy - İSTANBUL
Tel: 0212.249 4922 Faks: 0212.245 3287
e-posta: info@dys.com.tr